


Cangzhou Changyuan Fittings Co.,Ltd

Add:No.26 Shigang Road,Development Zone,Cangzhou ,Hebei,China Pc:061000

Http://www.con-well.com email:con-well@vip.163.com sale@con-well.com

3A Clamped Butterfly valve(卫生级3A快装蝶阀)

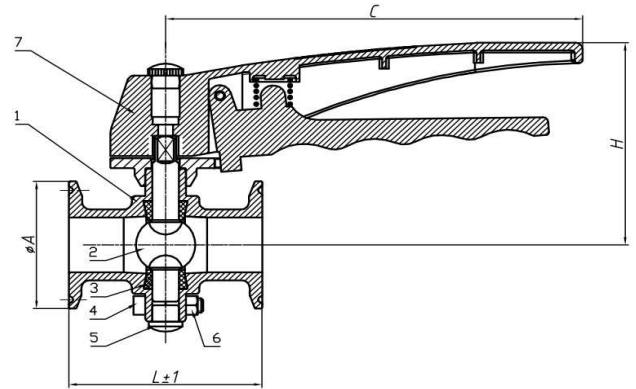

Size	A	C	L	H
1"	50.50	155.00	83.0	80.0
1 1/2"	50.50	155.00	66.0	88.0
2"	64.00	155.00	70.0	96.0
2 1/2"	77.50	155.00	80.0	116.0
3"	91.00	155.00	84.0	123.0
4"	119.00	155.00	98.0	135.0

Material List:

Item	Description	Material
1	Body	304/316/316L
2	Disc	304/316/316L
3	Seal	EPDM/Silion
4	Bolt	304
5	Plug	NBR
6	Nut	304
7	Handle	Plastic

FEATURES:



- Rated Pressure: PN1.0Mpa
- PED97/23/EC (CE0038) Approved.
- Inspection Testing:API598
- Working temperture: -40°C--150°C

Cangzhou Changyuan Fittings Co.,Ltd


Add:No.26 Shigang Road,Development Zone,Cangzhou ,Hebei,China Pc:061000

Http://www.con-well.com email:con-well@vip.163.com sale@con-well.com

3A Clamped Butterfly valve(卫生级3A快装蝶阀)

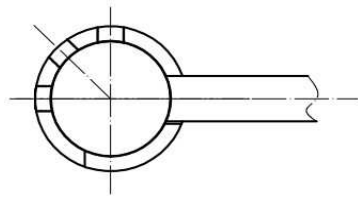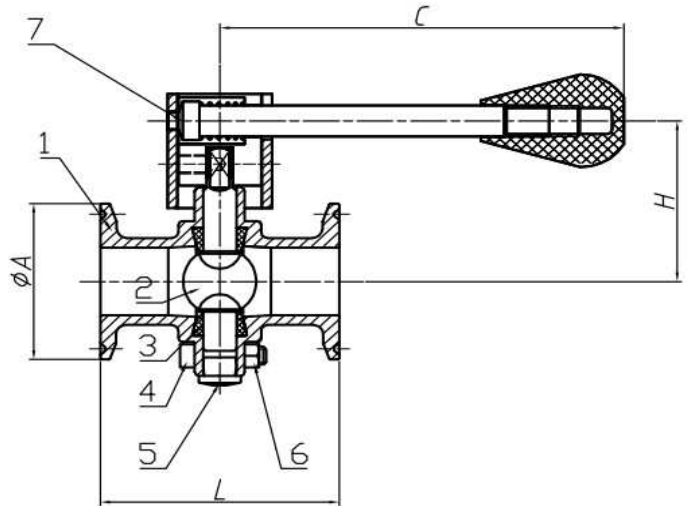

or



Direction (3 +1 holes)

Direction (4 +1 holes)

3A Clamped Butterfly valve

Size	A	C	L	H
1"	50.50	129.00	83.0	52.0
1 1/2"	50.50	129.00	66.0	59.0
2"	64.00	137.00	70.0	67.5
2 1/2"	77.50	137.00	80.0	82.0
3"	91.00	137.00	84.0	89.0
4"	119.00	147.00	98.0	101.6

Material

Item	Description	MATERIAL
1	Body	304/316/316L
2	Disc	304/316/316L
3	Seal	EPDM/Silion
4	Boit	304
5	Plug	NBR
6	Nut	304
7	Muti-position Handle	304(3 or 4 holes)

FEATURES:

- Rated Pressure: PN1.0Mpa
- PED97/23/EC (CE0038) Approved.
- Inspection Testing:API598
- Working temperture: -40℃--150℃