




Cangzhou Changyuan Fittings Co.,ltd Con-Well Metal Vietman Co.,ltd

vietnam plant: Lot 12, N11 Road, Dat Do I Industrial Zone, Phuoc Long Tho Ward, Dat Do District, Ba Ria Vung Tau Province

Head office: No.33 Jiuhe East Road,Development Zone,Cangzhou,Hebei,China 061000

Casting&Forging Plant: No.26 Shigang Road,Development Zone,Cangzhou,Hebei,China 061000

Http://www.con-well.com E-mail: con-well@vip.163.com; sale@con-well.com

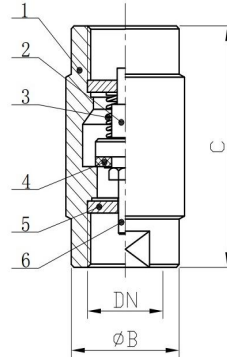

1PC SPRING VERTICAL CHECK VALVE (mm)

DN	Size	B	C	D	Unit weight(KG)
10	3/8"	24.0	65.0	25.0	0.170
15	1/2"	29.0	66.0	30.0	0.213
20	3/4"	35.0	68.5	36.0	0.300
25	1"	45.0	77.0	47.5	0.503
32	1 1/4"	50.5	89.0	51.5	0.675
40	1 1/2"	58.0	98.5	59.0	0.883
50	2"	71.5	102.0	72.5	1.290

MATERIAL LIST

ITEM	DESCRIPTION	MATERIAL
1	BODY	CF8/CF8M
2	STEM	CF8/CF8M
3	SPRING	304/316
4	SEAT	PTFE
5	STOPPER	304/316
6	NUT	304

FEATURES:

- Working pressure: PN40
- Suitable medium:W.O.G.
- Thread: BSP,BSPT,DIN,NPT.
- PED97/23/EC(CE0343)Approved.
- Inspection Testing:API598,EN12266.
- Working temperature:-10°C to 150°C.